

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
30 October 2003 (30.10.2003)


PCT

(10) International Publication Number  
WO 03/089297 A1

- (51) International Patent Classification: B64C 25/16
- (21) International Application Number: PCT/GB03/01587
- (22) International Filing Date: 28 March 2003 (28.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0208963.9 19 April 2002 (19.04.2002) GB
- (71) Applicant (for all designated States except US): BAE SYSTEMS PLC (GB/GB); 6 Carlton Gardens, London SW1Y 5AD (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): BRIANCOURT, Stephen, Paul (GB/GB); Airbus UK Limited, A380, New Filton House, Filton, Bristol BS99 7AR (GB).
- (74) Agent: BAE SYSTEMS PLC; Group IP Department, Lancaster House, P.O. Box 87, Farnborough Aerospace Centre, Farnborough, Hampshire GU14 6YU (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: LANDING GEAR DOOR ASSEMBLY

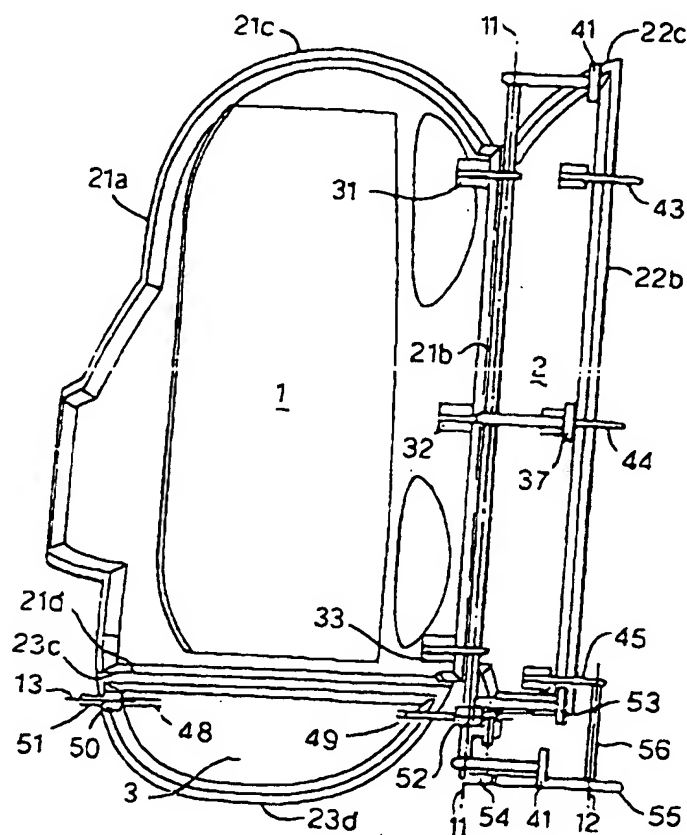

(57) Abstract: An aircraft landing gear door assembly has a plurality of doors. The doors include a first door (1) mounted for rotational movement between closed and open positions about a first generally longitudinal axis (11) and a transverse door (3) mounted for rotational movement between closed and open positions about a generally horizontal axis (13) that is transverse to the longitudinal axis (11). The provision of the transverse door (3) can allow the length of the first door (1) to be reduced from that which would otherwise be required to allow passage of the landing gear.